




FLUSH DOORS SOLICORE (SCX1)

SOLICORE TIMBER FRAME WATER RESISTANT PARTICLE BOARD CORE (SCX1)

DESIGN CODE	PRIMECOAT MDF <small>(Internal Use Only)</small>	DURAXP	PAINT GRADE PLY	SPM	TASSIE OAK
Standard size (mm)					
2040x520/620/720/770/820x35	282	316	316	330	1564
2040x870x35	336	344	354	363	1599
2040x920x35	402	440	454	477	1707
2040x1020x35	444	480	492	499	2017
2340x520/620/720/770/820x35	344	457	377	391	1624
2340x870x35	398	412	426	421	1654
2040x720/770/820x40	318	361	363	379	1612
2040x870x40	380	417	426	426	1661
2040x920x40	541	579	631	613	1841
Special size (mm) up to					
2100x920x35	495	542	548	568	1782
2340x920x35	559	590	575	609	1823
2400x1200x35	597	640	613	665	
2700x1200x35	828	867			

Solicore Particleboard Core

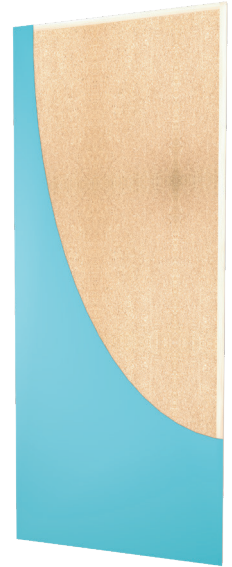

Made to order

Door Thickness	40mm	Additional \$145
Door Thickness	45mm	P.O.A.

- For additional extras refer to page 57
- For glass openings in SCX1 doors refer to page 57
- Cancellations or alterations for made to order doors will only be accepted on the day of ordering

Specifications


	Solicore Particleboard Core (SCX1)		
	35mm	Rw: 29	STC: 29
	40mm	Rw: 30	STC: 29
	45kg (2040x820x40mm)		




Primecoat MDF



DuraXP

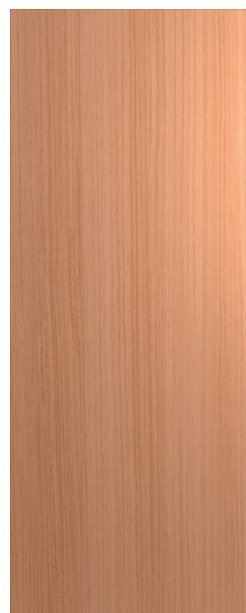

SPM

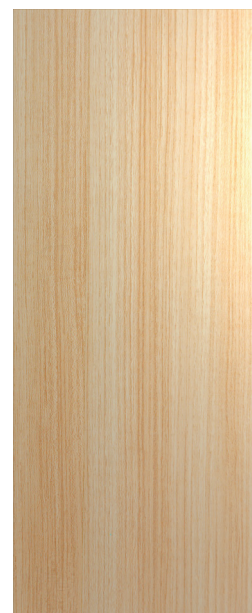

A'Bond Ply Paint Grade